

# SMD Seam Crystal Unit 5.0x3.2x0.9mm 5S Series



## Features

- . High precision characteristics covering up to wide frequency range. . Higher frequency stability and reliability.
- . Excellent for reducing EMI effect.
- . The best choice of Bluetooth, wireless communication set, DSC, PDA, mobile phone and USB interface card.




## Electrical Specifications

Item / Type	8 ~ 125MHz	
Frequency Range	8 ~ 125MHz	
Frequency Tolerance (at 25 °C)	± 20 ppm, or specify	± 10 ppm
Frequency Stability Over Operating Temperature Range	± 20 ppm, or specify	± 10 ppm
Operating Temperature Range	-10 ~ +70 °C, or specify	
Shunt Capacitance (C0)	5 pF Max. (2 pF typical)	
Drive Level	1 ~ 200 μW (100 μW typical)	
Load Capacitance	10 pF, 16 pF, 20 pF, or specify	6 pF, 9 pF, 10 pF, 12 pF, 16 pF
Aging (at 25 °C)	± 3 ppm / year Max.	± 1 ppm / year Max.
Storage Temperature Range	- 40 ~ + 85 °C	

## Equivalent Series Resistance(ESR)

Fundamental		3rd Overtone	
8 ~ 12 MHz	80 Ω Max.	30~ 54 MHz	60 Ω Max.
12 ~ 30MHz	60 Ω Max.	54~ 125MHz	80 Ω Max.

## Dimensions

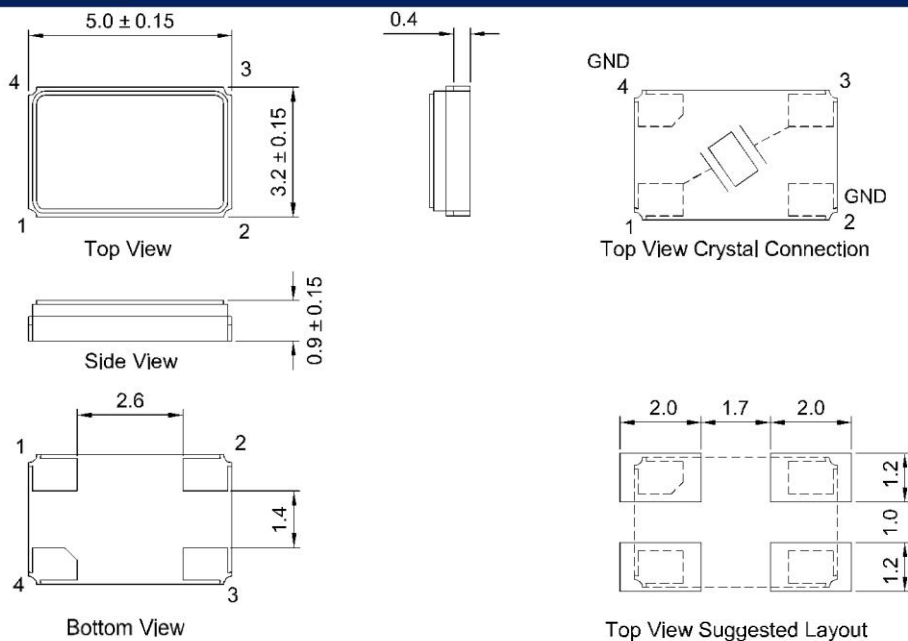

Units: mm